



Fiber Tech composite pvT.LTd.


GRATING LOAD TEST REPORT

Test report no	22/17-18	Date of Test	12.10.2018.
PO.NO.	-	CLIENT	-
Product	FRP MOULDED GRATING	Division	MOULDED
Job No.	SAMPLE	Total Qty	-
Product size	H -30MM	Test Piece Size	(W)1000 X (L)1000MM
Specification	MESH - 38 X 38MM	MOC	ISOPHTHALIC
Test sample	1	Sample No.	1
Test Condition	ATM	Clamping	YES

Section Height 30mm (Mesh : 38 x 38mm)

Clear Span	Δ U = Deflection in mm at uniform Load											REMARKS
	Load	75	161	250	315	425	515	690				
1580	Δ U	2.42	3.41	3.96	4.62	5.45	6.31	7.90				

LOAD Vs DEFLECTION

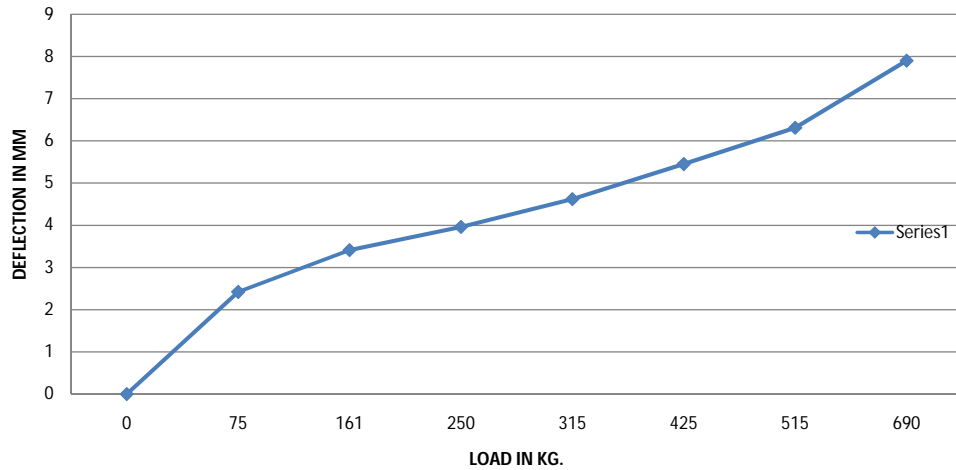

Specific Requirement : Nil

Remarks / Note:

CHECKED BY :



APPROVED BY :